


Soft-Start



Dimensions: (mm/inches)

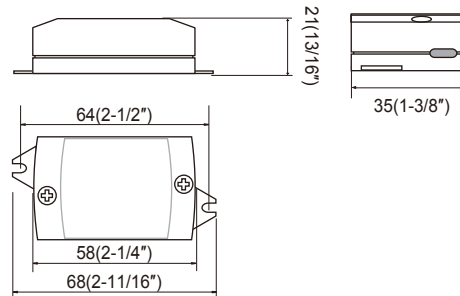

■ Features


- Class III Soft-Start ( in 2.5 seconds) converter, combined with constant current power supply
- Open circuit,short circuit protection
- Auto restart after fault conditions removal

■ Standards

- EN61347-2-13
- EN61347-1
- EN55015
- EN61547

■ Diagram

Brightness VS Time

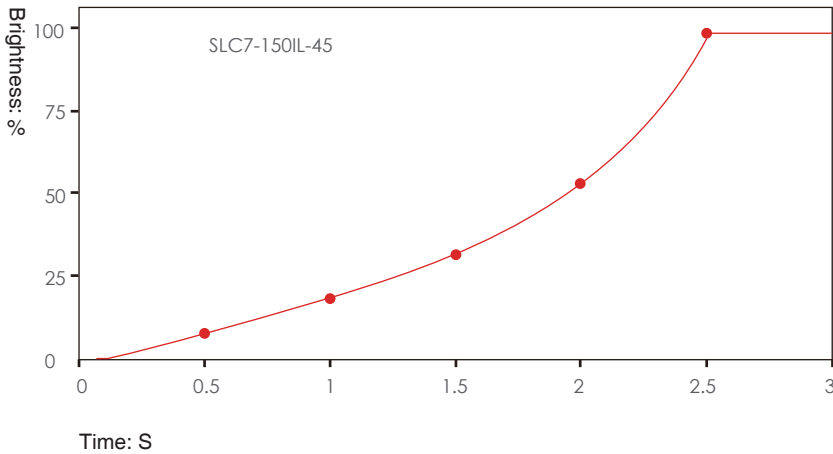

■ Characteristics

Model No.	Input Current	Input Voltage	ta	tc	L x W x H	Approval
SLC7-150IL-45 (Soft Start)	150mA~350mA	15-44V	-20~50°C	65°C	68x35x21mm (3-1/16"x1-9/16"x5/8")	CE

